

## Pre-Install Instructions


- ✓ Please review the diagram on the next page. This is our typical installation which fits most organizations. If your particular environment requires a different setup, please make sure you can easily locate the referenced devices.
- ✓ If your site uses PPPoE or a static IP and you have not given that information to Vendor Safe, please make sure to have it ready and let the Vendor Safe support engineer know before proceeding with the install. If you do not understand the above terms, that's ok - call us at 713.929.0200 and press 2 for support.
- ✓ Your firewall, when received, should be stored in a secure, room-temperature location such as your back office. Do not store your firewall in high-temperature areas.

Thanks from the,

# VST Support Team



If VST is providing wireless, then connect the antennas included in the box to the firewall. Make sure they are pointed perpendicular to the ground at 90 degree angles.

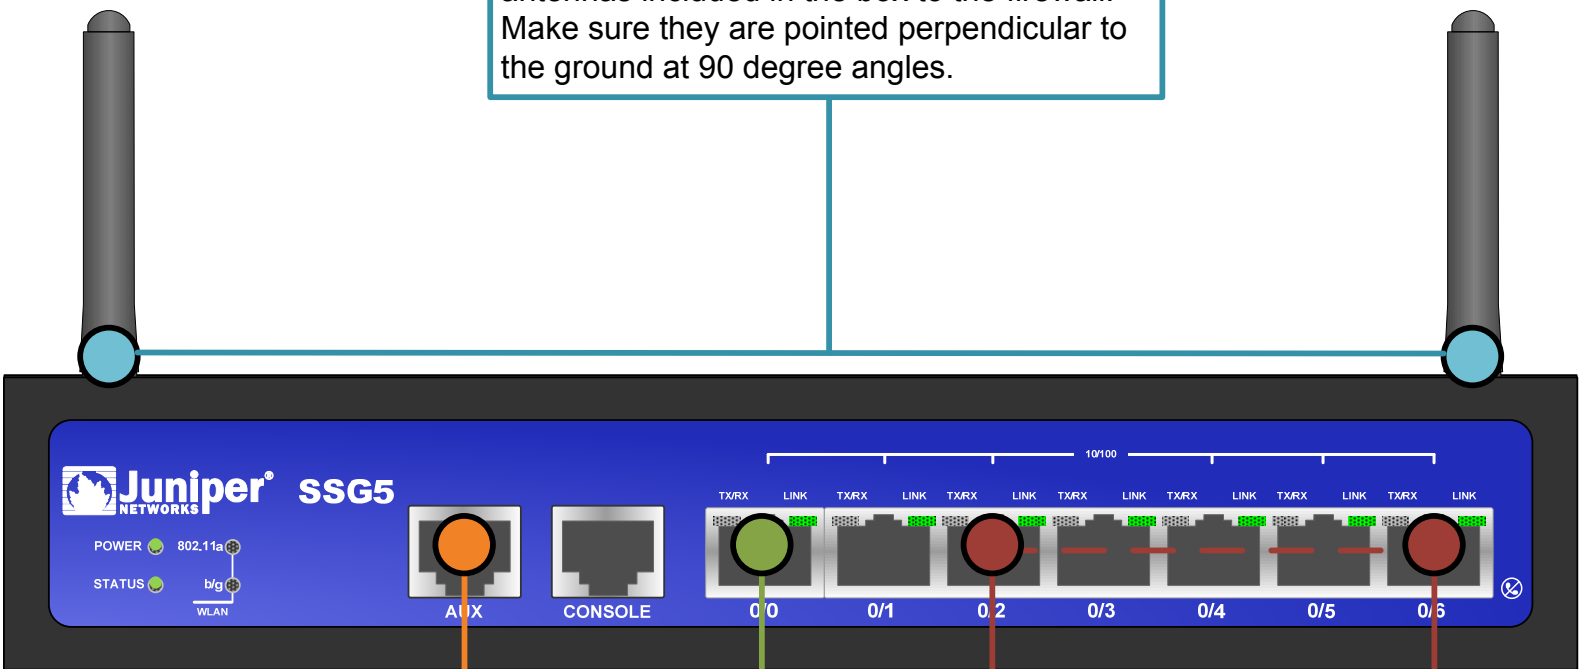

Install a phone line to a fax machine or secondary line for fail over.

Connect an Ethernet cable from this port to your current router/firewall.

Connect all of your devices to ports 0/2 through 0/6. This includes PC's, Terminals, Servers, DVR's, etc. These devices should be moved from your current router/firewall to here. You can use a switch to add port density by plugging it into one of these ports.



Protect Data. Secure Business.